



МАРТ

E-MART
ВАШ ПОСТАВЩИК
HIKVISION

<https://emart.su/brands/hikvision/>


Федеральный
Санкт-петербург
Москва
Краснодар

8 800 511-77-41
8 812 426-99-66
8 495 137-99-67
8 861 205-62-66

www.emart.su

mail@emart.su

Product Image



HIKVISION

Specification

Lock size : 205x34x42(mm)(L*W*H)

Bracket size : 90x25(mm)(L*W)

Latch size : 20mm

Input voltage : 12VDC



Working Current: dynamic currents $\leq 1.2A$,
static current $\leq 0.2A$

Signal Output: lock status

Door Type: wooden door, glass door,
metal door

Weight: 0.75KG

Cabling instructions

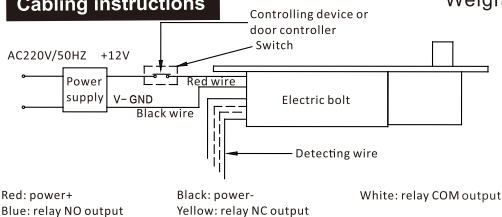

Remarks:
The delay adjustment jumper is: lock delay
The timing standard is: start timing after detecting the lock signal
(It can be adjusted to 3S, 6S according to usage requirements)

Power Cable

When the electric bolt lock is power off:

COM and NC are connected;

COM and NO are disconnected;

When the electric bolt lock is power on door open:

COM and NC are connected;

COM and NO are disconnected;

When the electric bolt lock is power on door close:


COM and NO are connected;

COM and NC are disconnected;



V+ connects with power 12VDC

V- connects with GND

Drawing

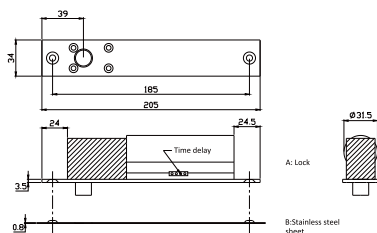


Wiring diagram



Installation Illustration



For standard door

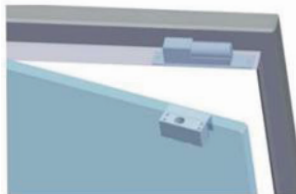

For glass door without down-frame

Please pay attention to the following items when installing and using:

1. It is forbidden to touch paint or volatile chemicals.
2. If there is dust on the surface of the product, please wipe it off gently with a soft cloth. Avoid rubbing or collision with rough objects.
3. When installing and using, if you have any questions, please call our factory.
4. During the warranty period, please do not disassemble the internal components of the product by yourself. Once disassembled by yourself, the underwriting rights will automatically become invalid.

Quality Certificate
Qualification Card

PASS

产品图片

HIKVISION



技术参数

锁体尺寸: 长205x宽34x厚42 (mm)

锁夹尺寸: 长90x宽25 (mm)

锁舌尺寸: 20mm

输入电压: 12VDC


工作电流: 启动电流 $\leq 1.2A$, 工作电流 $\leq 0.2A$

信号输出: 锁状态侦测信号输出

使用门型: 木门、玻璃门、金属门

产品重量: 0.75KG


接线示意图

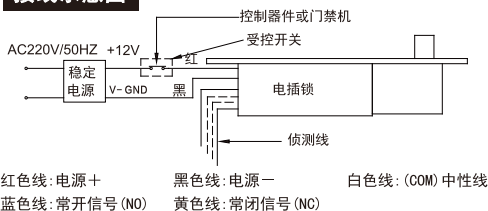

接线说明

电插锁断电状态时: COM与NC通路; V+ 接电源12VDC
COM与NO断路;
电插锁上电开门时: COM与NC通路; V- 接GND
COM与NO断路;
电插锁上电关门时: COM与NO通路;
COM与NC断路;


产品尺寸图

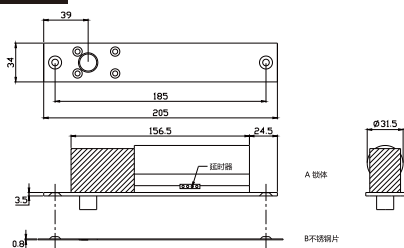

安装示意图




标准安装图

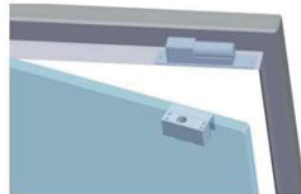

下无框玻璃门安装图

接线示意图



安装使用时请注意以下事项:

- 1、禁止接触油漆或带有挥发性化学物品。
- 2、产品表面若有灰尘, 请用软布轻轻抹掉即可, 应避免与粗糙的物品摩擦或碰撞。
- 3、安装使用时, 若有疑问请拨打电话与我厂联系。
- 4、在保修期内, 请不要自行拆卸产品内部组件, 一经自行拆卸, 其承保权则自动失效。

产品质量合格证
Qualification Card

PASS